


User Manual

12V Power Bank With Plastic Case

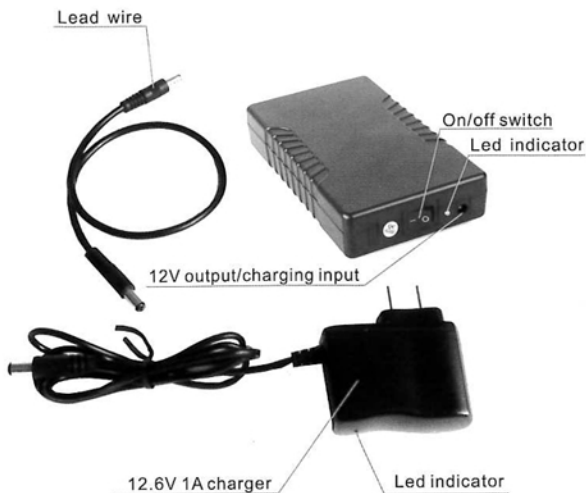

Product specification

Size	28*85*148mm
Battery Capacity	6000mAh
Output	12.6V~8.4V/3A max
Input	12.6V 1A
Full charge time	5-6 hrs
Operating temperature	-20~60°C

Operation guidance

1. Power ON and OFF

ON: Push switch to "I" position to make power on

OFF: Push switch to "O" position to make power off

How to charge the power bank

1. Connect AC-DC charger to power socket(100-240V available)

2. Connect power bank to AC-DC charger .

3. PUSH SWITCH OF POWER BANK TO "I" POSITION to make charging circuit breaker.

4. The led indicator of charger show **RED** means charging process going.

The led indicator of charger show **GREEN** means charging process completed OR CHARGING CIRCUIT IS OPEN, PLEASE CHECK IF YOU PUSH SWITCH OF POWER BANK TO "I" POSITION.

5. The led indicator of charger will change from red to **GREEN** while the power bank be 95% of full charged.

6. Push switch of power bank to "O" (OFF) position to make circuit open to prevent electric consumption of led indicator.

7. Full charge time(estimated)=Capacity of power bank / output current of charger

How to charge other devices(LED light/panel/strip, CCTV,IP CAMERA,AMPLIFIER...etc.)

1. Connect devices to power bank via lead wire of double male DC connector

2. Push switch of power bank to "I" position to make circuit breaker

Charging status

Charge power bank

Red indicator of charger on: Charging process

Green indicator of charger on: Power bank be full charged or charge circuit is OPEN, please check if you push switch to "I" position.

Led indicator of power bank on: Charging process

Charge other devices

Led indicator of battery on: discharge process

Accessories

1. YB 12V series power bank
2. Lead wire of double DC connector
3. 12.6V 1A charger with US plug